


Pokrycie:

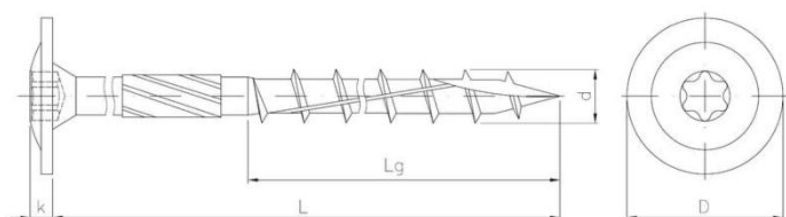

Wymiary

Material index	d - Średnica [mm]	L - Długość [mm]	D [mm]	k [mm]	Lg [mm]	Wgłębienia	Rodzaj pokrycia
3111060080TXAL2T	6.0	80	16.0	2.8	40	TX 30	A - ocynk żółty
3111060100TXAL2T	6.0	100	16.0	2.8	40	TX 30	A - ocynk żółty
3111060120TXAL2T	6.0	120	16.0	2.8	70	TX 30	A - ocynk żółty
3111060140TXAL2T	6.0	140	16.0	2.8	70	TX 30	A - ocynk żółty
3111060160TXAL2T	6.0	160	16.0	2.8	70	TX 30	A - ocynk żółty
3111060180TXAL2T							A - ocynk żółty
3111060200TXAL2T	6.0	200	16.0	2.8	70	TX 30	A - ocynk żółty
3111060220TXAL2T	6.0	220	16.0	2.8	70	TX 30	A - ocynk żółty
3111060240TXAL2T	6.0	240	16.0	2.8	70	TX 30	A - ocynk żółty
3111060260TXAL2T							A - ocynk żółty
3111060280TXAL2T	6.0	280	16.0	2.8	70	TX 30	A - ocynk żółty
3111060300TXAL2T	6.0	300	16.0	2.8	70	TX 30	A - ocynk żółty
3111080080TXAL2T	8.0	80	22.0	3.6	40	TX 40	A - ocynk żółty
3111080100TXAL2T	8.0	100	22.0	3.6	40	TX 40	A - ocynk żółty
3111080120TXAL2T	8.0	120	22.0	3.6	80	TX 40	A - ocynk żółty
3111080140TXAL2T	8.0	140	22.0	3.6	80	TX 40	A - ocynk żółty
3111080160TXAL2T	8.0	160	22.0	3.6	80	TX 40	A - ocynk żółty
3111080180TXAL2T	8.0	180	22.0	3.6	80	TX 40	A - ocynk żółty
3111080200TXAL2T	8.0	200	22.0	3.6	80	TX 40	A - ocynk żółty
3111080220TXAL2T	8.0	220	22.0	3.6	80	TX 40	A - ocynk żółty

Material index	d - Średnica [mm]	L - Długość [mm]	D [mm]	k [mm]	Lg [mm]	Wgłębienia	Rodzaj pokrycia
3111080240TXAL2T	8.0	240	22.0	3.6	80	TX 40	A - ocynk żółty
3111080260TXAL2T	8.0	260	22.0	3.6	80	TX 40	A - ocynk żółty
3111080280TXAL2T	8.0	280	22.0	3.6	80	TX 40	A - ocynk żółty
3111080320TXAL2T	8.0	320	22.0	3.6	80	TX 40	A - ocynk żółty
3111080340TXAL2T							A - ocynk żółty
3111080360TXAL2T	8.0	360	22.0	3.6	80	TX 40	A - ocynk żółty
3111080380TXAL2T	8.0	380	22.0	3.6	80	TX 40	A - ocynk żółty
3111080400TXAL2T	8.0	400	22.0	3.6	80	TX 40	A - ocynk żółty
3111100120TXAL2T							A - ocynk żółty
3111100140TXAL2T	10.0	140	25.0	4.2	80	TX 40	A - ocynk żółty
3111100160TXAL2T	10.0	160	25.0	4.2	80	TX 40	A - ocynk żółty
3111100180TXAL2T	10.0	180	25.0	4.2	80	TX 40	A - ocynk żółty
3111100200TXAL2T	10.0	200	25.0	4.2	80	TX 40	A - ocynk żółty
3111100220TXAL2T	10.0	220	25.0	4.2	80	TX 40	A - ocynk żółty
3111100240TXAL2T	10.0	240	25.0	4.2	80	TX 40	A - ocynk żółty
3111100260TXAL2T							A - ocynk żółty
3111100280TXAL2T	10.0	260	25.0	4.2	80	TX 40	A - ocynk żółty
3111100300TXAL2T	10.0	300	25.0	4.2	80	TX 40	A - ocynk żółty
3111100320TXAL2T	10.0	320	25.0	4.2	80	TX 40	A - ocynk żółty
3111100340TXAL2T	10.0	340	25.0	4.2	80	TX 40	A - ocynk żółty
3111100360TXAL2T	10.0	360	25.0	4.2	80	TX 40	A - ocynk żółty
3111100380TXAL2T	10.0	380	25.0	4.2	80	TX 40	A - ocynk żółty
3111100400TXAL2T	10.0	400	25.0	4.2	80	TX 40	A - ocynk żółty