



15.32
NRM-A

Mufa wkręcana z wgłębieniem imbusowym, z kołnierzem i stożkowym gwintem zewnętrznym

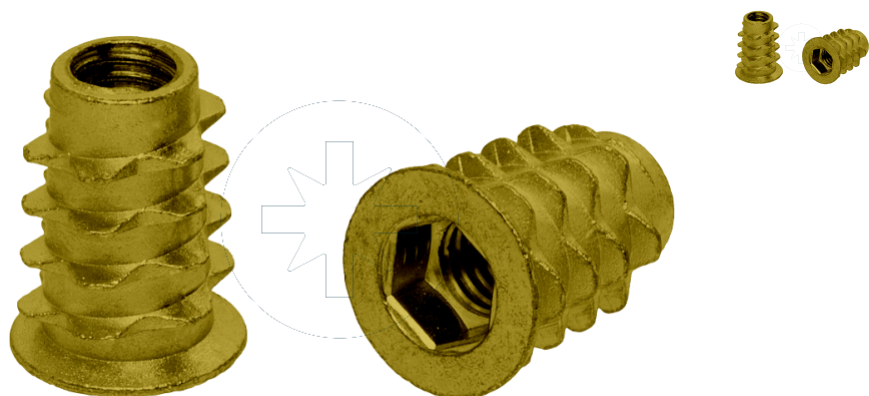

Pokrycie:

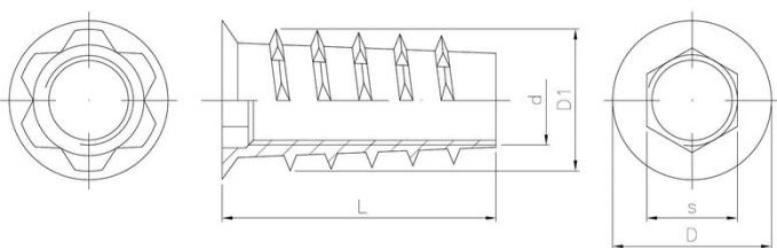

Wymiary

Material index	d - Średnica [mm]	L - Długość [mm]	D1 [mm]	D [mm]	s [mm]	Rodzaj pokrycia
1532100160025AZNT	M10	25	15.10	16.0	10	A - ocynk żółty
1532060125016AZNT	M6	16	11.70	12.5	6	A - ocynk żółty
1532050115013AZNT	M5	13	10.60	11.5	5	A - ocynk żółty
1532050115010AZNT	M5	10	10.60	11.5	5	A - ocynk żółty
1532060125020AZNT	M6	20	11.90	12.5	6	A - ocynk żółty
1532060120013AZNT	M6	13	11.70	12.5	6	A - ocynk żółty
1532060125010AZNT	M6	10	11.60	12.5	6	A - ocynk żółty
1532080145013AZNT	M8	13	13.50	14.5	8	A - ocynk żółty
1532100160013AZNT	M10	13	15.10	16.0	10	A - ocynk żółty
1532060125025AZNT	M6	25	12.00	12.5	6	A - ocynk żółty
1532080145025AZNT	M8	25	13.80	14.5	8	A - ocynk żółty
1532040085010AZNT	M4	10	8.0	8.5	4	A - ocynk żółty
1532050115020AZNT	M5	20	10.80	11.5	5	A - ocynk żółty