


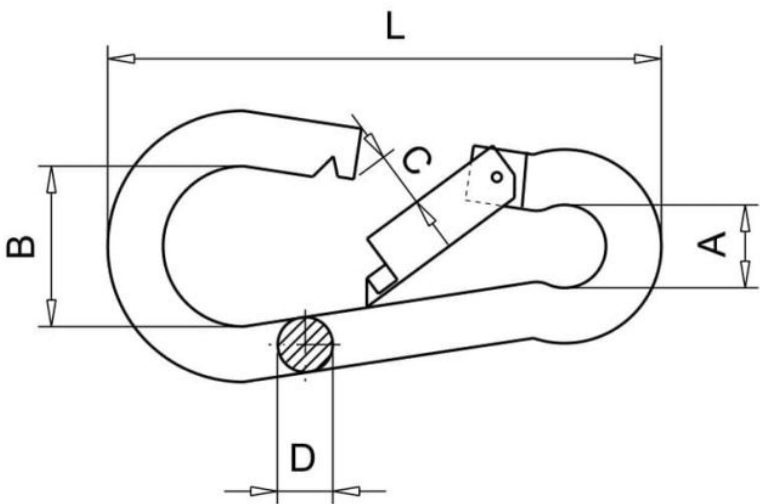

Wymiary

Material index	Typ	A [mm]	B [mm]	C [mm]	D [mm]	L - Długość [mm]	Obciążenie zrywające [kg]
I6323040040A4S	4x40	9	11.7	7	4	40	590
I6323050050A4S	5x50	10	15	8	5	50	650
I6323050050A4KAUS	5x50 + kausza	10	15	8	5	50	
I6323060060A4S	6x60	11	17	9	6	60	900
I6323060060A4KAUS	6x60 + kausza	11	17	9	6	60	850
I6323080080A4S	8x80	13	23	9	8	80	1500
I6323080080A4KAUS	8x80 + kausza	13	23	9	8	80	1200
I6323100100A4KAUS	10x100 + kausza	16	29	12	10	100	1750
I6323100100A4S	10x100	16	29	12	10	100	1800
I6323110120A4KAUS	11x120 + kausza	18	36	16	11	120	1850
I6323110120A4S	11x120	18	36	16	11	120	1900
I6323120140A4KAUS	12x140 + kausza	20	40	19	12	140	1880
I6323120140A4S	12x140	20	40	19	12	140	2100