




Pokrycie:

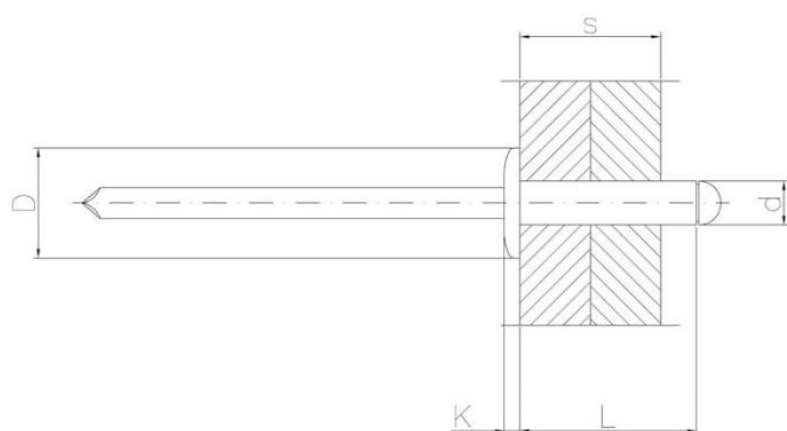

B

POWŁOKA  
CYNKOWA  
BIAŁA

## Wymiary

Material index	d - Średnica [mm]	L - Długość [mm]	D [mm]	s [mm]	k [mm]	Jednostka miary
2402040100AS9010T	4.0	10	8.0	5.0-6.5	1.0	TYS.
2402040100AST	4.0	10	8.0	5.0-6.5	1.0	TYS.
2402040100AS9005T	4.0	10	8.0	5.0-6.5	1.0	TYS.
2402060100AST	6.0	10	12.0	3.0-4.5	1.5	TYS.
2402048100ASK	4.8	10	9.5	4.5-6.0	1.1	KG
2402050100AST	5.0	10	9.5	4.5-6.0	1.1	TYS.
2402032100AST	3.2	10	6.5	5.5-7.0	0.8	TYS.
2402030100ASK	3.0	10	6.5	5.5-7.0	0.8	KG
2402050100ASK	5.0	10	9.5	4.5-6.0	1.1	KG
2402030100AST	3.0	10	6.5	5.5-7.0	0.8	TYS.
2402048100AST	4.8	10	9.5	4.5-6.0	1.1	TYS.
2402040100ASK	4.0	10	8.0	5.0-6.5	1.0	KG
2402050120AST	5.0	12	9.5	6.0-8.0	1.1	TYS.
2402050120ASK	5.0	12	9.5	6.0-8.0	1.1	KG
2402032120AST	3.2	12	6.5	7.0-9.0	0.8	TYS.
2402040120ASK	4.0	12	8.0	6.5-8.5	1.0	KG

Material index	d - Średnica [mm]	L - Długość [mm]	D [mm]	s [mm]	k [mm]	Jednostka miary
2402040120AST	4.0	12	8.0	6.5-8.5	1.0	TYS.
2402040120AS9010T	4.0	12	8.0	6.5-8.5	1.0	TYS.
2402030120ASK	3.0	12	6.5	7.0-9.0	0.8	KG
2402048120ASK	4.8	12	9.5	6.0-8.0	1.1	KG
2402030120AST	3.0	12	6.5	7.0-9.0	0.8	TYS.
2402060120AST	6.0	12	12.0	4.5-6.0	1.5	TYS.
2402048120AST	4.8	12	9.5	6.0-8.0	1.1	TYS.
2402040120AS9005T	4.0	12	8.0	6.5-8.5	1.0	TYS.
2402060120ASK	6.0	12	12.0	4.5-6.0	1.5	KG
2402050140ASK	5.0	14	9.5	8.0-10.0	1.1	KG
2402030140AST	3.0	14	6.5	9.0-11.0	0.8	TYS.
2402030140ASK	3.0	14	6.5	9.0-11.0	0.8	KG
2402040140AST	4.0	14	8.0	8.5-10.5	1.0	TYS.
2402040140ASK	4.0	14	8.0	8.5-10.5	1.0	KG
2402048140ASK	4.8	14	9.5	8.0-10.0	1.1	KG
2402050140AST	5.0	14	9.5	8.0-10.0	1.1	TYS.
2402048140AST	4.8	14	9.5	8.0-10.0	1.1	TYS.
2402048160AST	4.8	16	9.5	10.0-12.0	1.1	TYS.
2402060160ASK	6.0	16	12.0	8.5-12.0	1.5	KG
2402040160ASK	4.0	16	8.0	10.5-12.5	1.0	KG
2402060160AST	6.0	16	12.0	8.5-12.0	1.5	TYS.
2402048160ASK	4.8	16	9.5	10.0-12.0	1.1	KG
2402030160AST	3.0	16	6.5	11.0-13.0	0.8	TYS.
2402040160AST	4.0	16	8.0	10.5-12.5	1.0	TYS.
2402050160AST	5.0	16	9.5	10.0-11.5	1.1	TYS.
2402032160AST	3.2	16	6.5	9.0-12.0	0.8	TYS.
2402050160ASK	5.0	16	9.5	10.0-11.5	1.1	KG
2402060180AST	6.0	18	12.0	10.5-12.5	1.5	TYS.
2402050180ASK	5.0	18	9.5	12.0-14.0	1.1	KG
2402050180AST	5.0	18	9.5	12.0-14.0	1.1	TYS.
2402048180AST	4.8	18	9.5	12.0-14.0	1.1	TYS.
2402040180AST	4.0	18	8.0	12.5-14.5	1.0	TYS.
2402060180ASK	6.0	18	12.0	10.5-12.5	1.5	KG
2402048180ASK	4.8	18	9.5	12.0-14.0	1.1	KG
2402050200ASK	5.0	20	9.5	13.0-15.0	1.1	KG
2402060200AST	6.0	20	12.0	11.0-15.0	1.5	TYS.
2402040200ASK	4.0	20	8.0	14.5-16.5	1.0	KG
2402040200AST	4.0	20	8.0	14.5-16.5	1.0	TYS.
2402050200AST	5.0	20	9.5	13.0-15.0	1.1	TYS.

<b>Material index</b>	<b>d - Średnica [mm]</b>	<b>L - Długość [mm]</b>	<b>D [mm]</b>	<b>s [mm]</b>	<b>k [mm]</b>	<b>Jednostka miary</b>
2402048200ASK	4.8	20	9.5	12.0-15.0	1.1	KG
2402048210AST	4.8	21	9.5	14.0-16.0	1.1	TYS.
2402048240AST	4.8	24	9.5	16.0-19.0	1.1	TYS.
2402048240ASK	4.8	24	9.5	16.0-19.0	1.1	KG
2402040250AST	4.0	25	8.0	16.5-21.5	1.0	TYS.
2402060250AST	6.0	25	12.0	15.0-19.0	1.5	TYS.
2402050250AST	5.0	25	9.5	16.0-21.0	1.1	TYS.
2402060300AST	6.0	30	12.0	19.0-25.0	1.5	TYS.
2402040300AST	4.0	30	8.0	21.5-26.0	1.0	TYS.
2402048300ASK	4.8	30	9.5	20.0-25.0	1.1	KG
2402050300AST	5.0	30	9.5	21.0-25.0	1.1	TYS.
2402048300AST	4.8	30	9.5	20.0-25.0	1.1	TYS.
2402048350AST	4.8	35	9.5	25.0-30.0	1.1	TYS.
2402030060ASK	3.0	6	6.5	1.5-3.5	0.8	KG
2402030060AST	3.0	6	6.5	1.5-3.5	0.8	TYS.
2402040060AST	4.0	6	8.0	1.5-3.0	1.0	TYS.
2402048060AST	4.8	6	9.5	0.5-3.0	1.1	TYS.
2402032060AST	3.2	6	6.5	1.5-3.5	0.8	TYS.
2402040060ASK	4.0	6	8.0	1.5-3.0	1.0	KG
2402040080AS8017T	4.0	8	8.0	3.0-5.0	1.0	TYS.
2402050080AST	5.0	8	9.5	3.0-4.5	1.1	TYS.
2402040080AS9010T	4.0	8	8.0	3.0-5.0	1.0	TYS.
2402030080AST	3.0	8	6.5	3.5-5.5	0.8	TYS.
2402040080AST	4.0	8	8.0	3.0-5.0	1.0	TYS.
2402040080ASK	4.0	8	8.0	3.0-5.0	1.0	KG
2402050080ASK	5.0	8	9.5	3.0-4.5	1.1	KG
2402032080AST	3.2	8	6.5	3.5-5.5	0.8	TYS.
2402048080AST	4.8	8	9.5	3.0-4.5	1.1	TYS.
2402040080AS9005T	4.0	8	8.0	3.0-5.0	1.0	TYS.
2402030080ASK	3.0	8	6.5	3.5-5.5	0.8	KG
2402048080ASK	4.8	8	9.5	3.0-4.5	1.1	KG